
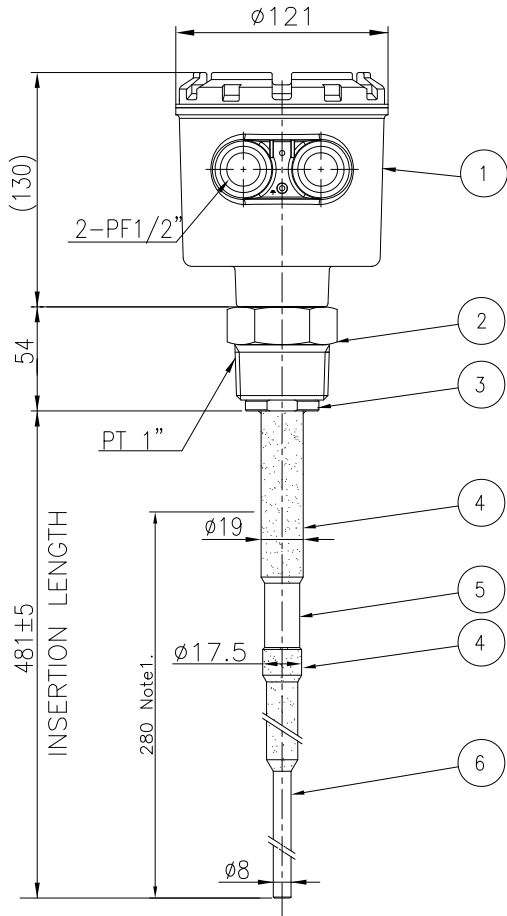


DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	20	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup>
TEMP. (SENSOR)	DESIGN	-10 ~ 60	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-20 ~ 60	°C
	OPERATING	-	°C
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	DC 24V(DC 16~30V) 2-WIRE		
ENCLOSURE	WEATHER PROOF		
SENSITIVITY RANGE	5 ~ 30 pF		
SIGNAL	NON DETECTION	9 ~ 12mA	
	DETECTION	18 ~ 21mA	
DELAY TIME	0.5, 2, 4, 6 SEC		
MOISTURE	Max 80%RH		

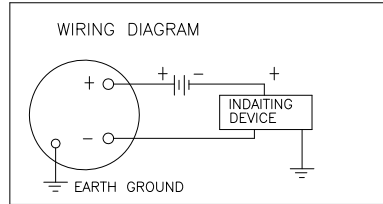

NOTES

- Minimum Length to be exposed to the measuring substance

REVISION

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
6	PROBE	316SS	1		
5	METAL SLEEVE	316SS	1		
4	INSULATOR	PPS	1		
3	INSERT "A"	304SS/316SS	1		
2	NIPPLE	304SS/316SS	1		
1	HEAD	ADC12	1		

BILL OF MATERIAL



CUSTOMER	-
PROJECT	-
TITLE	RADIOFREQUENCY TYPE LEVEL SWITCH SRF-600-A-1-A-1-A-2 ASSEMBLY DRAWING
MANUFACTURER	SeoJin Instech Co., Ltd.

△					
△					
△					
△					
△	FOR APPROVAL	2018.04.17	H.I.JOUNG	S.H.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

SCALE		ERP CODE	0000	Work Order No.	-	REV.	
N/S	DWG NO.	SJ-MO23-DWG-AP001					

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	20	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup>
TEMP. (SENSOR)	DESIGN	-10 ~ 60	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-20 ~ 60	°C
	OPERATING	-	°C
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	DC 24V(DC 16~30V) 2-WIRE		
ENCLOSURE	WEATHER PROOF		
SENSITIVITY RANGE	5 ~ 30 pF		
SIGNAL	NON DETECTION	9 ~ 12mA	
	DETECTION	18 ~ 21mA	
DELAY TIME	0.5, 2, 4, 6 SEC		
MOISTURE	Max 80%RH		

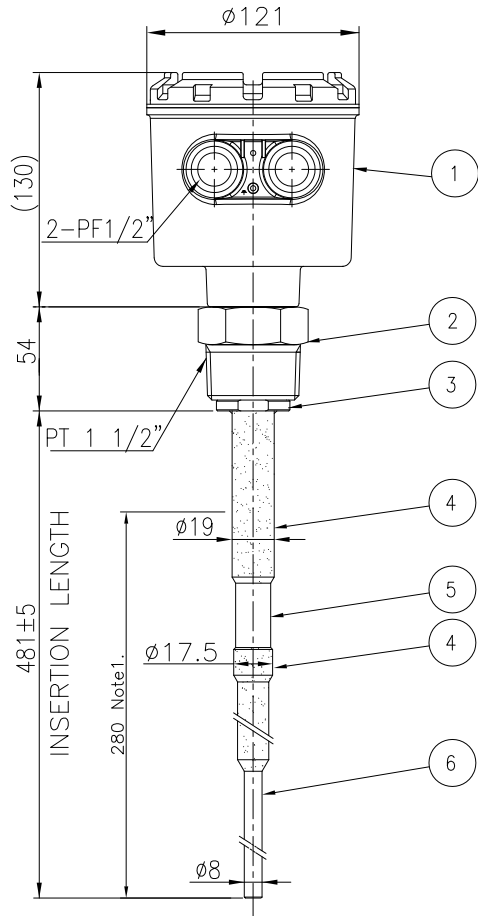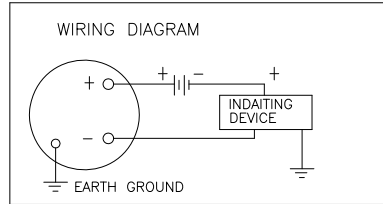

NOTES

- Minimum Length to be exposed to the measuring substance

REVISION

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
6	PROBE	316SS	1		
5	METAL SLEEVE	316SS	1		
4	INSULATOR	PPS	1		
3	INSERT "A"	304SS/316SS	1		
2	NIPPLE	304SS/316SS	1		
1	HEAD	ADC12	1		

BILL OF MATERIAL



CUSTOMER	-
PROJECT	-
TITLE	RADIOFREQUENCY TYPE LEVEL SWITCH SRF-600-A-2-A-1-A-2 ASSEMBLY DRAWING
MANUFACTURER	SeoJin Instech Co., Ltd.

△					
△					
△					
△					
△	FOR APPROVAL	2018.04.17	H.I.JOUNG	S.H.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

SCALE		ERP CODE	0000	Work Order No.	-	REV.	
N/S	DWG NO.	SJ-M023-DWG-AP002					

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID			
-			
PRESS.	DESIGN	20	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup>
TEMP. (SENSOR)	DESIGN	-10 ~ 60	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-20 ~ 60	°C
	OPERATING	-	°C
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	DC 24V(DC 16~30V) 2-WIRE		
ENCLOSURE	WEATHER PROOF		
SENSITIVITY RANGE	5 ~ 30 pF		
SIGNAL	NON DETECTION	9 ~ 12mA	
	DETECTION	18 ~ 21mA	
DELAY TIME	0.5, 2, 4, 6 SEC		
MOISTURE	Max 80%RH		

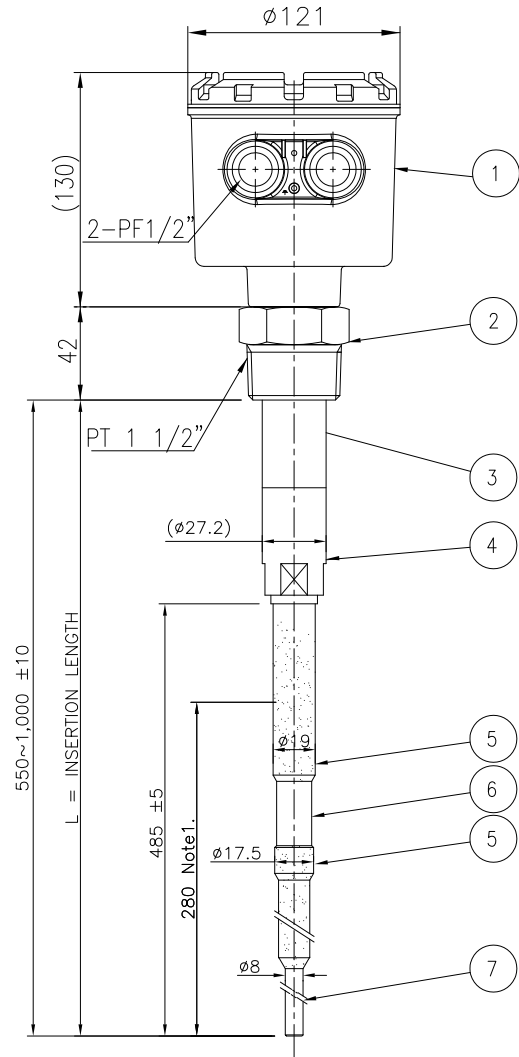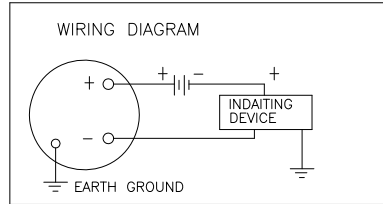

NOTES

- Minimum Length to be exposed to the measuring substance

REVISION



NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
7	PROBE	316SS	1		
6	METAL SLEEVE	316SS	1		
5	INSULATOR	PPS	1		
4	CONNECTOR	304SS/316SS	1		
3	PIPE	304SS/316SS	1		
2	NIPPLE	304SS/316SS	1		
1	HEAD	ADC12	1		

BILL OF MATERIAL

CUSTOMER	-		
PROJECT	-		
TITLE	RADIOFREQUENCY TYPE LEVEL SWITCH SRF-600-A-2-C-1-A-2 ASSEMBLY DRAWING		
MANUFACTURER			

△					
△					
△					
△					
△	FOR APPROVAL	2018.04.17	H.I.JOUNG	S.H.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

SCALE		ERP CODE	0000	Work Order No.	-	REV.	
N/S	DWG NO.	SJ-M023-DWG-AP003					

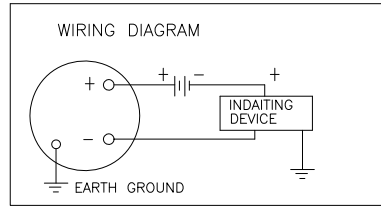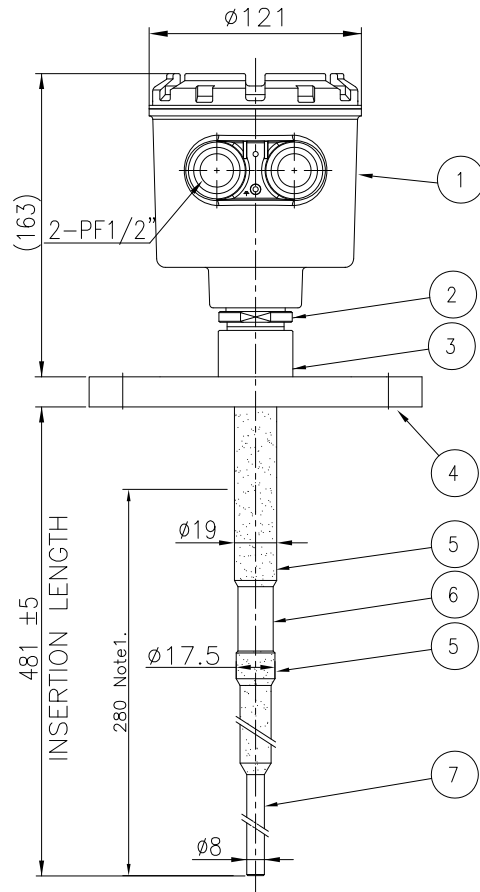

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	20	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup> (According to FLANGE specification)
TEMP. (SENSOR)	DESIGN	-10 ~ 60	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-20 ~ 60	°C
	OPERATING	-	°C
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	DC 24V(DC 16~30V) 2-WIRE		
ENCLOSURE	WEATHER PROOF		
SENSITIVITY RANGE	5 ~ 30 pF		
SIGNAL	NON DETECTION	9 ~ 12mA	
	DETECTION	18 ~ 21mA	
DELAY TIME	0.5, 2, 4, 6 SEC		
MOISTURE	Max 80%RH		

TAG NO.	L=481±5

NOTES

- Minimum Length to be exposed to the measuring substance

REVISION



7	PROBE	316SS	1		
6	METAL SLEEVE	316SS	1		
5	INSULATOR	PPS	1		
4	FLANGE	304SS/316SS	1		
3	SOCKET	304SS/316SS	1		
2	INSERT "B"	304SS/316SS	1		
1	HEAD	ADC 12	1		
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

BILL OF MATERIAL

CUSTOMER	-
PROJECT	-
TITLE	RADIOFREQUENCY TYPE LEVEL SWITCH SRF-600-A-3-B-1-A-2 ASSEMBLY DRAWING
MANUFACTURER	<b>SeoJin Instech Co., Ltd.</b>

△					
△					
△					
△					
△	FOR APPROVAL	2018.04.17	H.I.JOUNG	S.H.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

SCALE	N/S	ERP CODE	0000	Work Order No.	-	REV.	△
DWG NO.	SJ-M023-DWG-AP004						

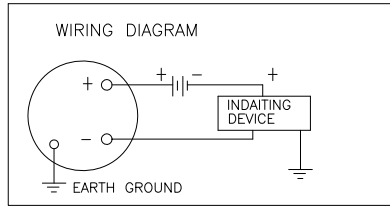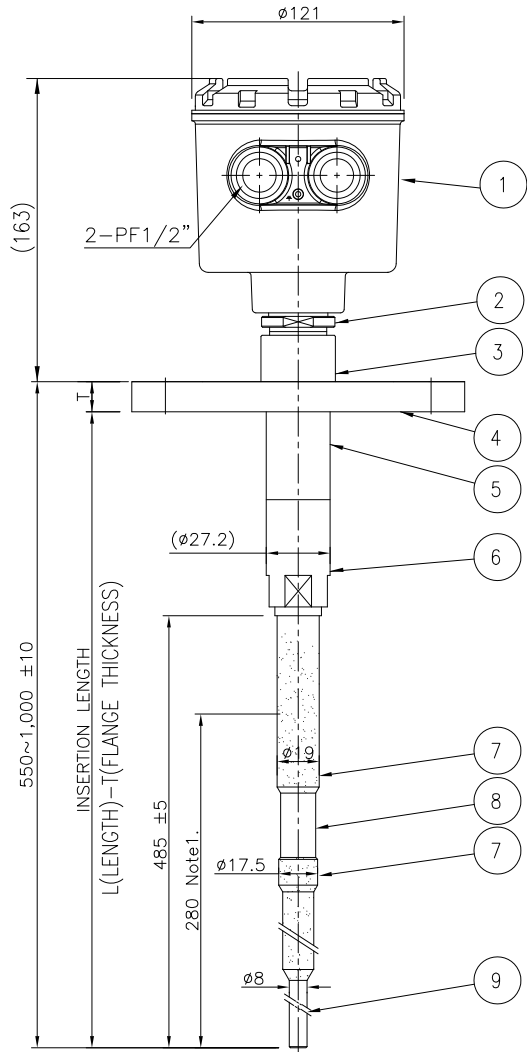

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	20	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup> (According to FLANGE specification)
TEMP. (SENSOR)	DESIGN	-10 ~ 60	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-20 ~ 60	°C
	OPERATING	-	°C
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	DC 24V(DC 16~30V) 2-WIRE		
ENCLOSURE	WEATHER PROOF		
SENSITIVITY RANGE	5 ~ 30 pF		
SIGNAL	NON DETECTION	9 ~ 12mA	
	DETECTION	18 ~ 21mA	
DELAY TIME	0.5, 2, 4, 6 SEC		
MOISTURE	Max 80%RH		

TAG NO.	L

NOTES

- Minimum Length to be exposed to the measuring substance

REVISION



NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
9	PROBE	316SS	1		
8	METAL SLEEVE	316SS	1		
7	INSULATOR	PPS	1		
6	CONNECTOR	304SS/316SS	1		
5	PIPE	304SS/316SS	1		
4	FLANGE	304SS/316SS	1		
3	SOCKET	304SS/316SS	1		
2	INSERT "B"	304SS/316SS	1		
1	HEAD	ADC 12	1		

BILL OF MATERIAL

CUSTOMER	-
PROJECT	-
TITLE	RADIOFREQUENCY TYPE LEVEL SWITCH SRF-600-A-3-C-1-A-2 ASSEMBLY DRAWING
MANUFACTURER	<b>SeoJin Instech Co., Ltd.</b>

△					
△					
△					
△					
△	FOR APPROVAL	2018.04.17	H.I.JOUNG	S.H.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

SCALE	N/S	ERP CODE	0000	Work Order No.	-	REV.	△
DWG NO.	SJ-M023-DWG-AP005						

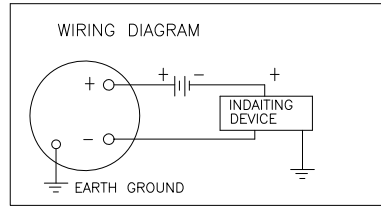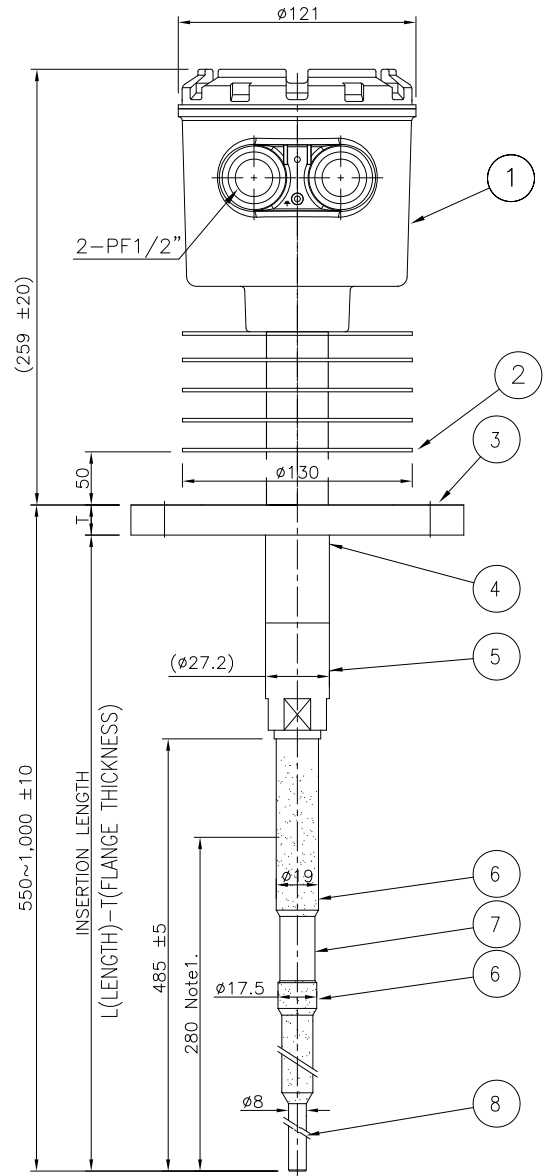

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	20	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup> (According to FLANGE specification)
TEMP. (SENSOR)	DESIGN	-20°C to +240°C °C	
	OPERATING	- °C	
TEMP. (ELECTRONICS)	DESIGN	-20 ~ 60 °C	
	OPERATING	- °C	
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	DC 24V(DC 16~30V) 2-WIRE		
ENCLOSURE	WEATHER PROOF		
SENSITIVITY RANGE	5 ~ 30 pF		
SIGNAL	NON DETECTION	9 ~ 12mA	
	DETECTION	18 ~ 21mA	
DELAY TIME	0.5, 2, 4, 6 SEC		
MOISTURE	Max 80%RH		

TAG NO.	L

NOTES

- Minimum Length to be exposed to the measuring substance

REVISION

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
8	PROBE	316SS	1		
7	METAL SLEEVE	316SS	1		
6	INSULATOR	PPS	1		
5	CONNECTOR	304SS/316SS	1		
4	PIPE	304SS/316SS	1		
3	FLANGE	304SS/316SS	1		
2	RADIATION PLATE	Al	5		
1	HEAD	ADC 12	1		

BILL OF MATERIAL



CUSTOMER	-
PROJECT	-
TITLE	RADIOFREQUENCY TYPE LEVEL SWITCH SRF-600-B-3-C-1-A-2 ASSEMBLY DRAWING
MANUFACTURER	<b>SeoJin Instech Co., Ltd.</b>

△					
△					
△					
△					
△	FOR APPROVAL	2018.04.17	H.I.JOUNG	S.H.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

SCALE	N/S	ERP CODE	0000	Work Order No.	-	REV.	△
DWG NO.	SJ-M023-DWG-AP006						

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	20	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup>
TEMP. (SENSOR)	DESIGN	-10 ~ 60	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-20 ~ 60	°C
	OPERATING	-	°C
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	DC 24V(DC 16~30V) 2-WIRE		
ENCLOSURE	WEATHER PROOF		
SENSITIVITY RANGE	5 ~ 30 pF		
SIGNAL	NON DETECTION	DPDT	
	DETECTION	DPDT	
DELAY TIME	0.5, 2, 4, 6 SEC		
MOISTURE	Max 80%RH		

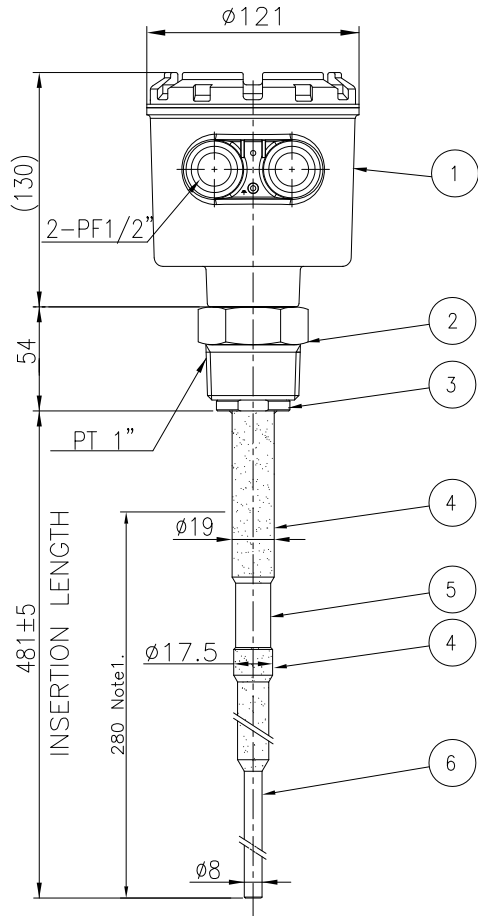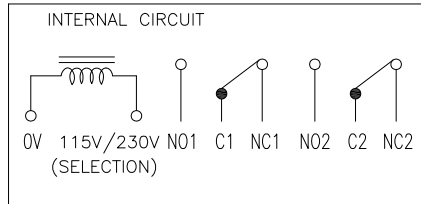

NOTES

- Minimum Length to be exposed to the measuring substance

REVISION

6	PROBE	316SS	1		
5	METAL SLEEVE	316SS	1		
4	INSULATOR	PPS	1		
3	INSERT "A"	304SS/316SS	1		
2	NIPPLE	304SS/316SS	1		
1	HEAD	ADC12	1		
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

BILL OF MATERIAL



CUSTOMER	-				
PROJECT	-				
TITLE	RADIOFREQUENCY TYPE LEVEL SWITCH SRF-900-A-1-A-1-A-2 ASSEMBLY DRAWING				
MANUFACTURER					

△					
△					
△					
△					
△	FOR APPROVAL	2018.04.17	H.I.JOUNG	S.H.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

SCALE		ERP CODE	0000	Work Order No.	-	REV.	
N/S	DWG NO.	SJ-M023-DWG-AP007					

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	20	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup>
TEMP. (SENSOR)	DESIGN	-10 ~ 60	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-20 ~ 60	°C
	OPERATING	-	°C
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	115/230VAC ±10%, 50/60Hz		
ENCLOSURE	WEATHER PROOF		
SENSITIVITY RANGE	5 ~ 30 pF		
SIGNAL	NON DETECTION	DPDT	
	DETECTION	DPDT	
DELAY TIME	0.5, 2, 4, 6 SEC		
MOISTURE	Max 80%RH		

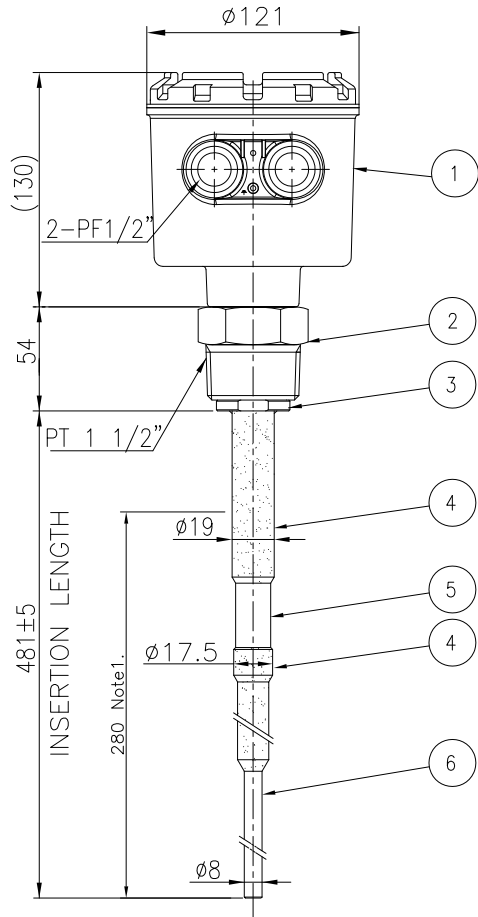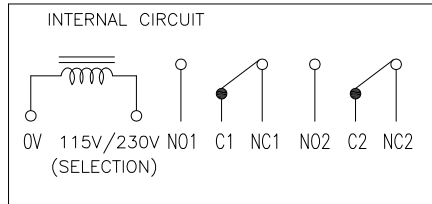

NOTES

- Minimum Length to be exposed to the measuring substance

REVISION

6	PROBE	316SS	1		
5	METAL SLEEVE	316SS	1		
4	INSULATOR	PPS	1		
3	INSERT "A"	304SS/316SS	1		
2	NIPPLE	304SS/316SS	1		
1	HEAD	ADC12	1		
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

BILL OF MATERIAL

CUSTOMER	-
PROJECT	-
TITLE	RADIOFREQUENCY TYPE LEVEL SWITCH SRF-900-A-2-A-1-A-2 ASSEMBLY DRAWING

MANUFACTURER

**SeoJin Instech Co., Ltd.**



△					
△					
△					
△					
△	FOR APPROVAL	2018.04.17	H.I.JOUNG	S.H.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

SCALE	N/S	ERP CODE	0000	Work Order No.	-	REV.	△
DWG NO.	SJ-M023-DWG-AP008						



DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID			
-			
PRESS.	DESIGN	20	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup>
TEMP. (SENSOR)	DESIGN	-10 ~ 60	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-20 ~ 60	°C
	OPERATING	-	°C
CONTACT RATING 250V AC, 5A			
POWER SUPPLY 115/230VAC ±10%, 50/60Hz			
ENCLOSURE WEATHER PROOF			
SENSITIVITY RANGE 5 ~ 30 pF			
SIGNAL	NON DETECTION	DPDT	
	DETECTION	DPDT	
DELAY TIME 0.5, 2, 4, 6 SEC			
MOISTURE Max 80%RH			

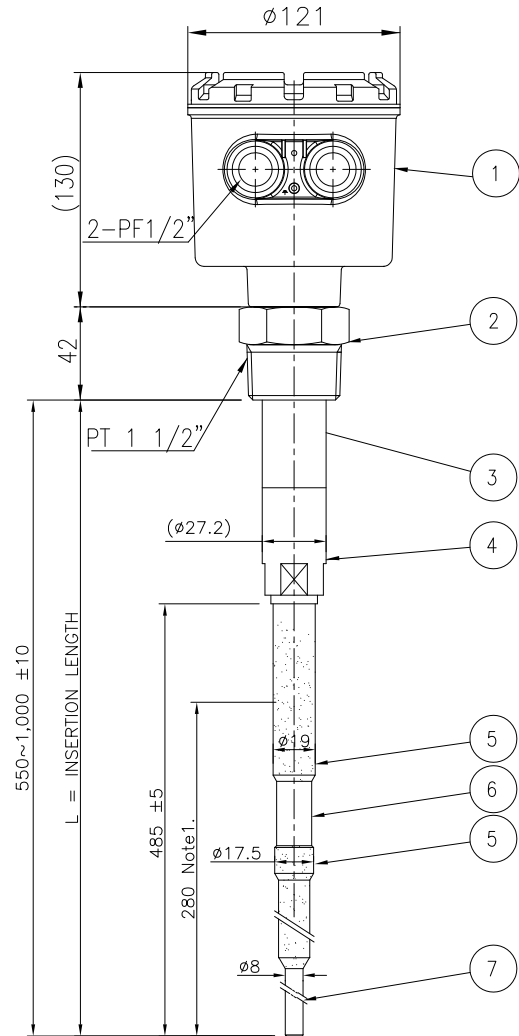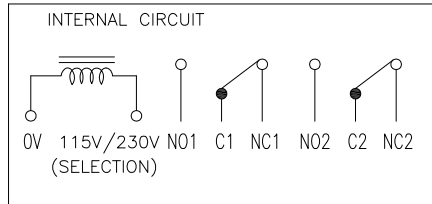

NOTES

- Minimum Length to be exposed to the measuring substance

REVISION



NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
7	PROBE	316SS	1		
6	METAL SLEEVE	316SS	1		
5	INSULATOR	PPS	1		
4	CONNECTOR	304SS/316SS	1		
3	PIPE	304SS/316SS	1		
2	NIPPLE	304SS/316SS	1		
1	HEAD	ADC12	1		

BILL OF MATERIAL

CUSTOMER	-
PROJECT	-
TITLE	RADIOFREQUENCY TYPE LEVEL SWITCH SRF-900-A-2-C-1-A-2 ASSEMBLY DRAWING
MANUFACTURER	SeoJin Instech Co., Ltd.

△					
△					
△					
△					
△	FOR APPROVAL	2018.04.17	H.I.JOUNG	S.H.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

SCALE		ERP CODE	0000	Work Order No.	-	REV.	
N/S	DWG NO.	SJ-M023-DWG-AP009					

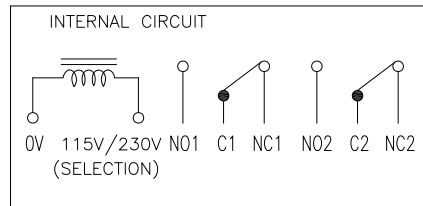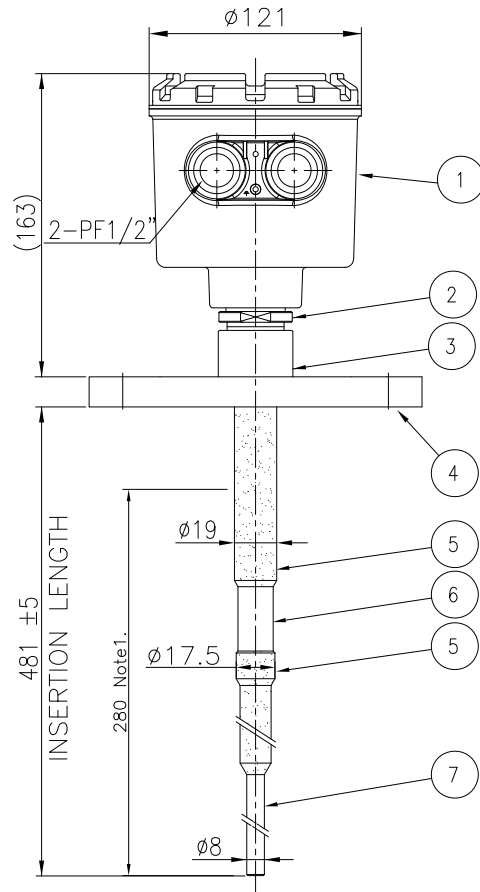

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	20	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup> (According to FLANGE specification)
TEMP. (SENSOR)	DESIGN	-10 ~ 60	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-20 ~ 60	°C
	OPERATING	-	°C
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	115/230VAC ±10%, 50/60Hz		
ENCLOSURE	WEATHER PROOF		
SENSITIVITY RANGE	5 ~ 30 pF		
SIGNAL	NON DETECTION	DPDT	
	DETECTION	DPDT	
DELAY TIME	0.5, 2, 4, 6 SEC		
MOISTURE	Max 80%RH		

TAG NO.	L=481±5

NOTES

- Minimum Length to be exposed to the measuring substance

REVISION



7	PROBE	316SS	1		
6	METAL SLEEVE	316SS	1		
5	INSULATOR	PPS	1		
4	FLANGE	304SS/316SS	1		
3	SOCKET	304SS/316SS	1		
2	INSERT "B"	304SS/316SS	1		
1	HEAD	ADC 12	1		
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

BILL OF MATERIAL

CUSTOMER	-
PROJECT	-
TITLE	RADIOFREQUENCY TYPE LEVEL SWITCH SRF-900-A-3-B-1-A-2 ASSEMBLY DRAWING
MANUFACTURER	<b>SeoJin Instech Co., Ltd.</b>

△					
△					
△					
△					
△	FOR APPROVAL	2018.04.17	H.I.JOUNG	S.H.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

SCALE	N/S	ERP CODE	0000	Work Order No.	-	REV.	△
DWG NO.	SJ-M023-DWG-AP010						

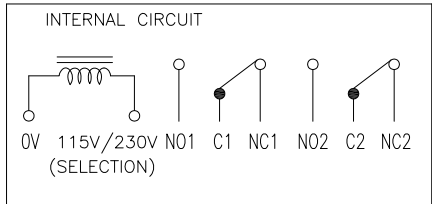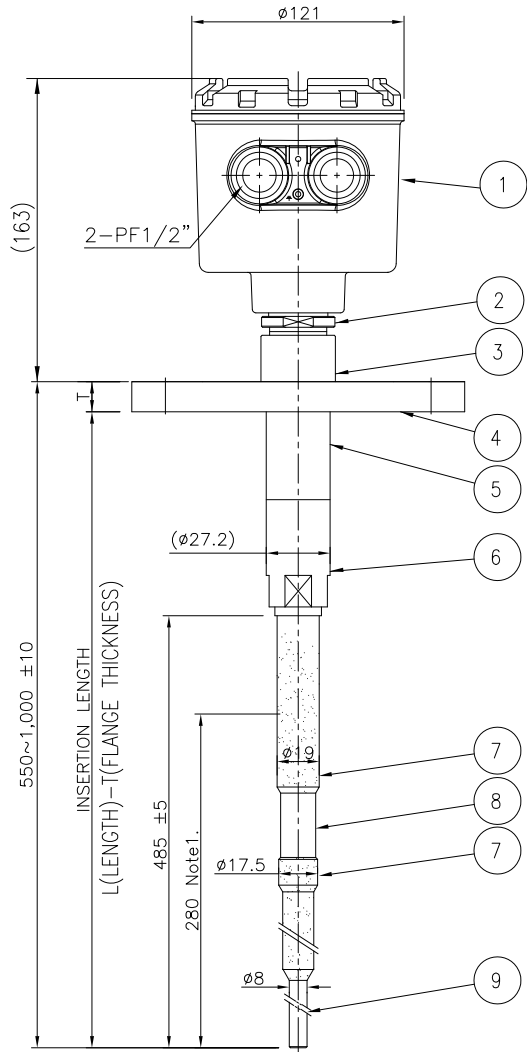

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	20	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup>
(According to FLANGE specification)			
TEMP. (SENSOR)	DESIGN	-10 ~ 60	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-20 ~ 60	°C
	OPERATING	-	°C
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	115/230VAC ±10%, 50/60Hz		
ENCLOSURE	WEATHER PROOF		
SENSITIVITY RANGE	5 ~ 30 pF		
SIGNAL	NON DETECTION	DPDT	
	DETECTION	DPDT	
DELAY TIME	0.5, 2, 4, 6 SEC		
MOISTURE	Max 80%RH		

TAG NO.	L

NOTES

- Minimum Length to be exposed to the measuring substance

REVISION



NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
9	PROBE	316SS	1		
8	METAL SLEEVE	316SS	1		
7	INSULATOR	PPS	1		
6	CONNECTOR	304SS/316SS	1		
5	PIPE	304SS/316SS	1		
4	FLANGE	304SS/316SS	1		
3	SOCKET	304SS/316SS	1		
2	INSERT "B"	304SS/316SS	1		
1	HEAD	ADC 12	1		

BILL OF MATERIAL

CUSTOMER	-
PROJECT	-
TITLE	RADIOFREQUENCY TYPE LEVEL SWITCH SRF-900-A-3-C-1-A-2 ASSEMBLY DRAWING
MANUFACTURER	<b>SeoJin Instech Co., Ltd.</b>

△					
△					
△					
△					
△	FOR APPROVAL	2018.04.17	H.I.JOUNG	S.H.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

SCALE	N/S	ERP CODE	0000	Work Order No.	-	REV.	△
DWG NO.	SJ-M023-DWG-AP011						

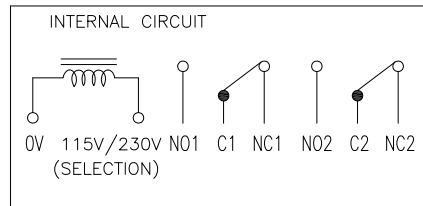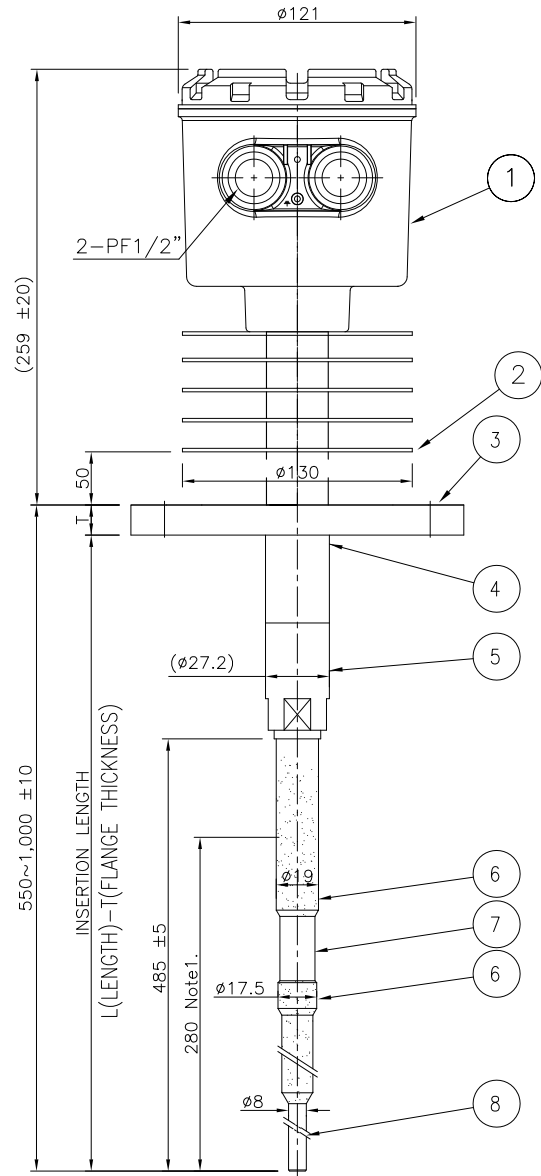

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	20	Kg/Cm <sup>2</sup>
	OPERATING	-	Kg/Cm <sup>2</sup>
(According to FLANGE specification)			
TEMP. (SENSOR)	DESIGN	-20°C to +240°C °C	
	OPERATING	- °C	
TEMP. (ELECTRONICS)	DESIGN	-20 ~ 60 °C	
	OPERATING	- °C	
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	115/230VAC ±10%, 50/60Hz		
ENCLOSURE	WEATHER PROOF		
SENSITIVITY RANGE	5 ~ 30 pF		
SIGNAL	NON DETECTION	DPDT	
	DETECTION	DPDT	
DELAY TIME	0.5, 2, 4, 6 SEC		
MOISTURE	Max 80%RH		

TAG NO.	L

NOTES

1. Minimum Length to be exposed to the measuring substance

REVISION

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
8	PROBE	316SS	1		
7	METAL SLEEVE	316SS	1		
6	INSULATOR	PPS	1		
5	CONNECTOR	304SS/316SS	1		
4	PIPE	304SS/316SS	1		
3	FLANGE	304SS/316SS	1		
2	RADIATION PLATE	Al	5		
1	HEAD	ADC 12	1		

BILL OF MATERIAL

CUSTOMER	-
PROJECT	-
TITLE	RADIOFREQUENCY TYPE LEVEL SWITCH SRF-900-B-3-C-1-A-2 ASSEMBLY DRAWING
MANUFACTURER	SeoJin Instech Co., Ltd.

△					
△					
△					
△					
△	FOR APPROVAL	2018.04.17	H.I.JOUNG	S.H.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

SCALE		ERP CODE	0000	Work Order No.	-	REV.	△
N/S	DWG NO.	SJ-M023-DWG-AP012					